



Standard executions


Version	Symbol	Code	Item
5/3 , top lever open centres spring return		034662	A1MA171LT
5/3 , top lever open centres 3 position		034663	A1MA174LT



Series of spool valves, with static seals, high flow.

Code key

Series	Actuation	Size	Function	Actuation
A1	MA=Manual	1 = 1/8"	71 = 5/3 CA spring return 74 = 5/3 CA 3 positions	LT = top lever

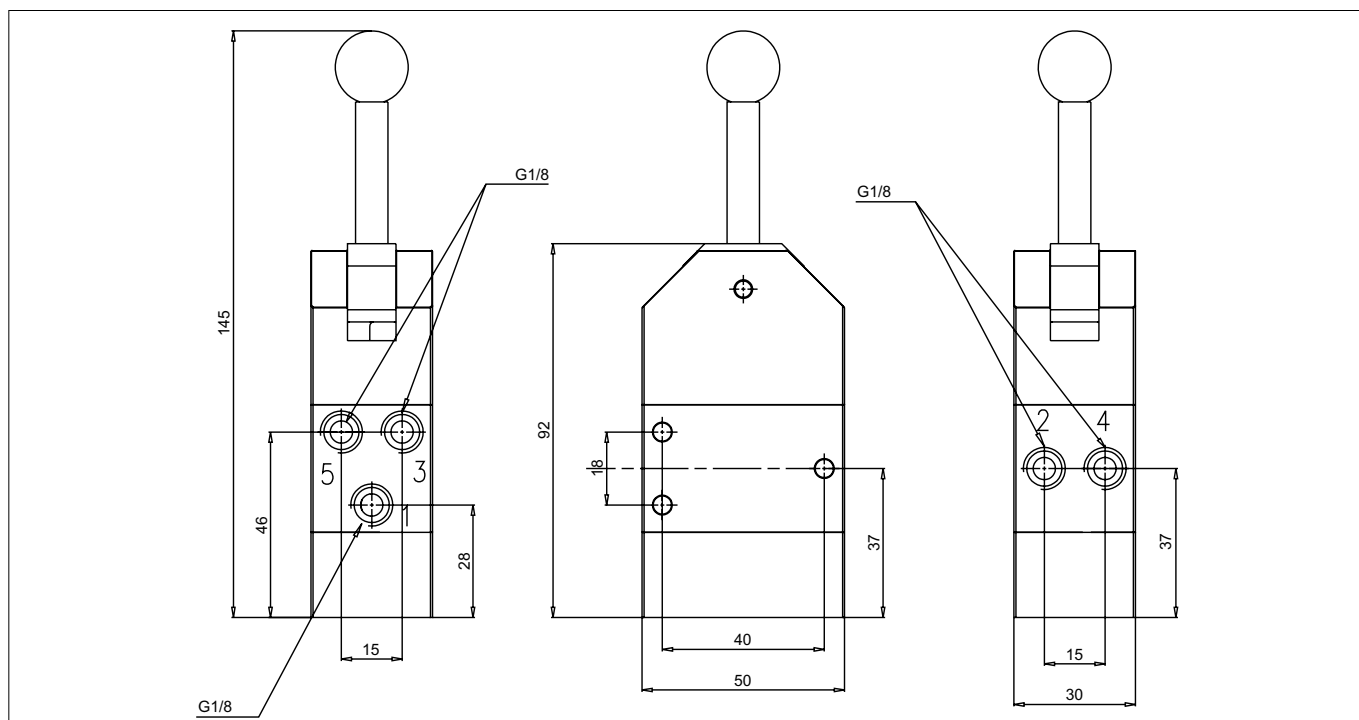

Technical data

Fluid	Compressed filtered air with or without lubrication. Lubrication, if started, must be continued.	
Pressure range	0 ÷ 10 bar	
Temperature range	-10 °C ÷ + 80°C	
Orifice	6,5 mm	
Flow	650 NI/min at 6 bar with ΔP 1 bar	
Mounting	In any position	
Materials	Body:	Aluminium anodized
	Cover:	Aluminium anodized
	End cap:	Aluminium anodized
	Spool:	Chemical nickel plated aluminium
	Distancers:	Fortron 1140 L4
	Seals:	Hydrogenated Nitrile Butadiene Rubber (HNBR)
	Lever:	Steel