



Standard executions			
Version	Symbol	Code	Item
3/2, normally closed, 1 position with safety device		033127	AVP230
3/2 normally closed, 2 positions with safety device		033128	AVP232
5/2, 1 position with safety device		033129	AVP250
5/2, 2 positions with safety device		033133	AVP251



Series of pedals with 3/2 or 5/2 valve, single and two stable position.

In the standard version they are provided with 1/4" spool valve and yellow shock-resistant protection in acetal resin and safety device to avoid possible improper actuations.

Type: **AVP2...**

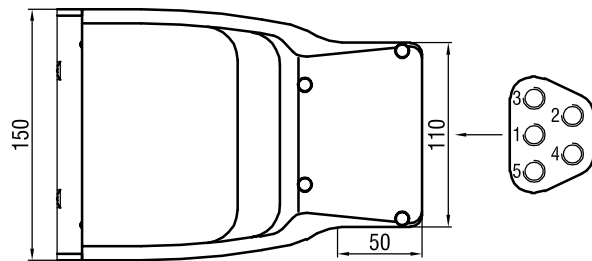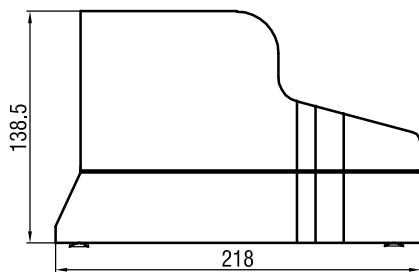

Technical data

Fluid	Compressed filtered air with or without lubrication. Lubrication, if started, must be continued.	
Pressure range	2,5 ÷ 10 bar	
Temperature range	0 °C ÷ + 50 °C	
Orifice	6,5 mm	
Flow	1000 NI/min	
Operating force	50 N	
Materials	Housing:	Shock-resistant acetal resin
	Valve body:	Profiled anodised aluminium
	Valve internal parts:	Nickel plated brass/Nickel plated aluminium/Stain-less steel - Seals: NBR
	Protection cover:	Shock-resistant acetal resin