


SOLENOID VALVE SEALING KIT WITH LOW ABSORPTION ELECTRIC COILS

Sealing kits are composed of a membrane, shutters and standard O-rings installed on our compressed air and vacuum three-way solenoid valves.


In the presence of very hot fluids (up to 250°C) or corrosive fluids, we can supply sealing kits in special compounds. Please contact our technical department.

Complete kit for solenoid valves:

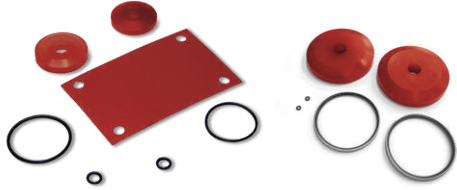

07 01 13 e 07 02 13	item 00 07 271
07 03 13	item 00 07 272
07 03 13 LP	item 00 07 290
07 04 13 e 07 05 13	item 00 07 273
07 04 13 LP e 07 05 13 LP	item 00 07 291
07 06 13	item 00 07 274
07 06 13 LP	item 00 07 292
07 08 13	item 00 07 379
07 09 13	item 00 07 383

Complete kit for solenoid valves:

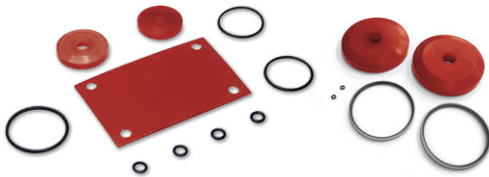


07 01 53 e 07 02 53	item 00 07 275
07 03 53	item 00 07 276
07 03 53 LP	item 00 07 293
07 04 53 e 07 05 53	item 00 07 277
07 04 53 LP e 07 05 53 LP	item 00 07 294
07 06 53	item 00 07 278
07 06 53 LP	item 00 07 295
07 08 53	item 00 07 379
07 09 53	item 00 07 383

Complete kit for solenoid valves:



07 03 43 e 07 04 43	item 00 07 279
07 03 63 e 07 04 63	item 00 07 279
07 05 43 e 07 05 63	item 00 07 280

PILOT MEMBRANES FOR SOLENOID VALVES WITH LOW ABSORPTION ELECTRIC COILS

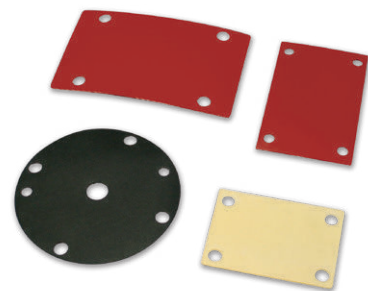

Item	For valves item	Connections	Material	Colour	Dimensions mm
00 07 104	07 03 43 - 07 04 43 07 03 63 - 07 04 63	G1/2" - G3/4"	Reinforced NBR	Black	Ø 65
00 07 105	07 05 43 - 07 05 63	G1"	Reinforced NBR	Black	Ø 76
00 07 229	07 01 13 - 07 01 53 07 02 13 - 07 02 53	G1/4" - G3/8"	Vulkollan®	Beige	49 x 35
00 07 230	07 03 13 - 07 03 53	G1/2"	Urepan® 65	Grey - orange	62 x 39
00 07 296	07 03 13 LP - 07 03 53 LP	G1/2"	Vulkollan®	Beige	62 x 39
00 07 231	07 04 13 - 07 04 53 07 05 13 - 07 05 53	G3/4" - G1"	Urepan® 65	Grey - orange	79 x 49
00 07 297	07 04 13 LP - 07 04 53 LP 07 05 13 LP - 07 05 53 LP	G3/4" - G1	Vulkollan®	Beige	79 x 49
00 07 232	07 06 13 - 07 06 53	G1" 1/2	Urepan® 65	Grey - orange	129 x 89
00 07 298	07 06 13 LP - 07 06 53 LP	G1" 1/2	Vulkollan®	Beige	129 x 89