




Standard executions

Version	Symbol	Code	Item
Filter-regulator + lubricator		090105	A38FRRL
Filter-regulator		090106	A38FRR
Filter		090107	A38F
Regulator		090108	A38R
Lubricator		090109	A38L

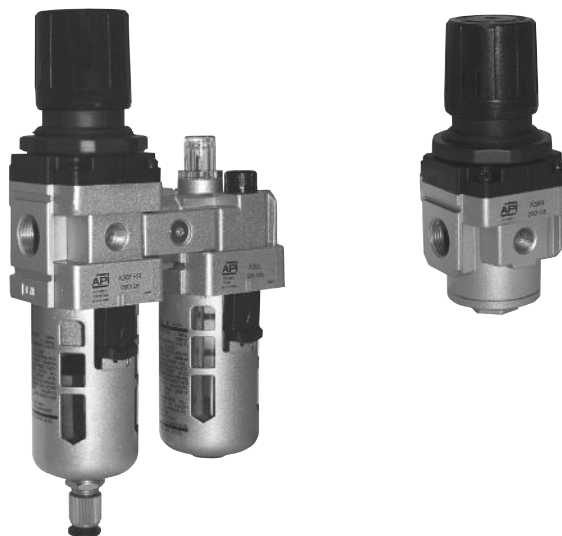

Series of modular units with the following standard features :

- Regulators with relieving valve
- Filters standard with 25µ cartridge
- Filters with semi-automatic condensate drain
- Cup with protection

The gauges are to be ordered separately; for gauges see from page 3.50.1

For mounting accessories, assembling kits and spare parts see from page 3.5.1



How to order: A38F5SA


Options	Suffix
Filter 5 µ cartridge	5
Automatic condensate drain for filters	SA
Metal cup	TM
With regulation range 0,5÷4 bar	04



A38F	5	SA
Version	Option	Option


Technical data



Technical data																
Fluid	Compressed air															
Maximum pressure	10 bar															
Regulation range	0,5 ÷ 8,5 bar															
Flow at 6 bar (NI/min)	A38FRRL = 1700; A38FRR = 2000; A38F = 1500; A38R = 2500; A38L = 1700															
Temperature range	0 ÷ 60 °C															
Suggested oil	With ISO VG 32 viscosity conforming to ISO 3448 standards															
Cup capacity	Filter : 20 cm ³ Lubricator : 50 cm ³															
Filtering element	Standard 25 µ - On request 5 µ															
Condense drain	Standard semi-automatic - On request automatic															
Materials	<table><tr><td>Body and cup protection:</td><td>Painted aluminium</td></tr><tr><td>Regulation group:</td><td>Plastic</td></tr><tr><td>Condense drain</td><td>Nickel plated brass</td></tr><tr><td>Filtering element</td><td>Sintered bronze</td></tr><tr><td>Diaphragm</td><td>Nitrile rubber (NBR)</td></tr><tr><td>Cup and sight glass</td><td>Polycarbonate</td></tr><tr><td>Springs</td><td>Steel</td></tr></table>		Body and cup protection:	Painted aluminium	Regulation group:	Plastic	Condense drain	Nickel plated brass	Filtering element	Sintered bronze	Diaphragm	Nitrile rubber (NBR)	Cup and sight glass	Polycarbonate	Springs	Steel
Body and cup protection:	Painted aluminium															
Regulation group:	Plastic															
Condense drain	Nickel plated brass															
Filtering element	Sintered bronze															
Diaphragm	Nitrile rubber (NBR)															
Cup and sight glass	Polycarbonate															
Springs	Steel															

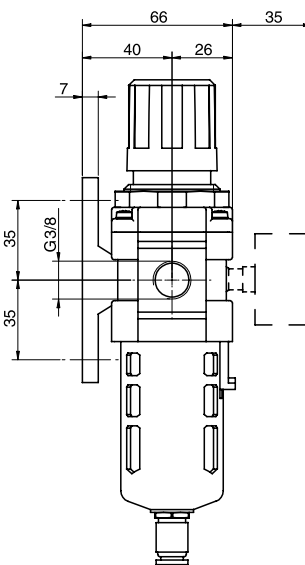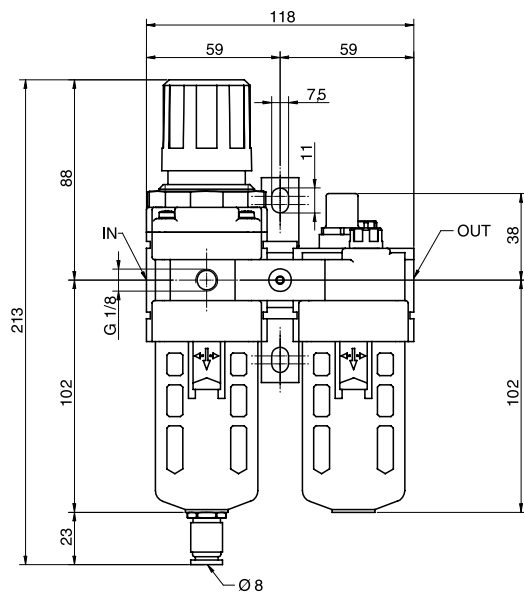



Version	Symbol	Code	Item
Filter-regulator + lubricator		090105	A38FRRL

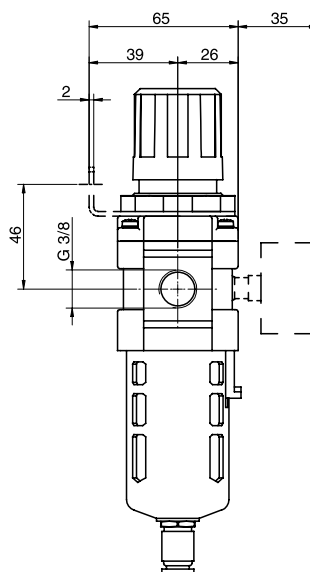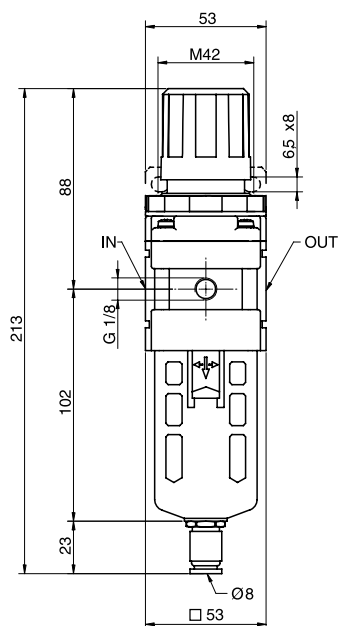



Version	Symbol	Code	Item
Filter-regulator		090106	A38FRR

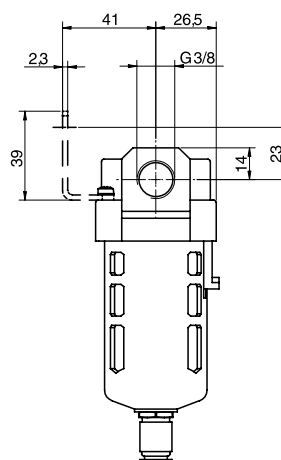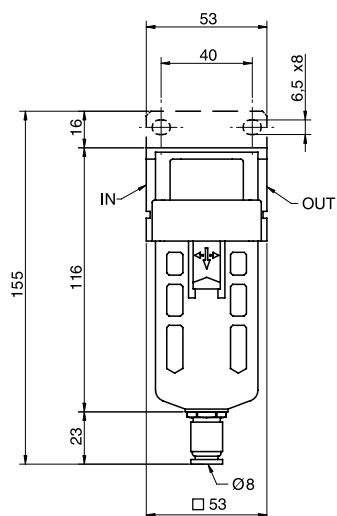

Version	Symbol	Code	Item
Filter		090107	A38F

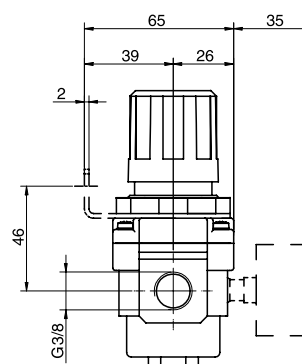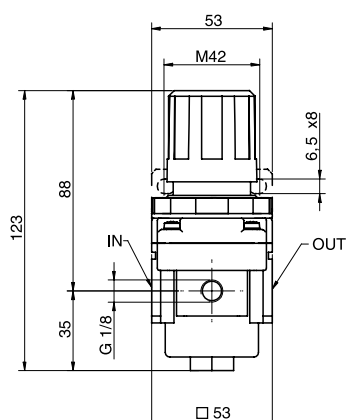

Version	Symbol	Code	Item
Regulator		090108	A38R

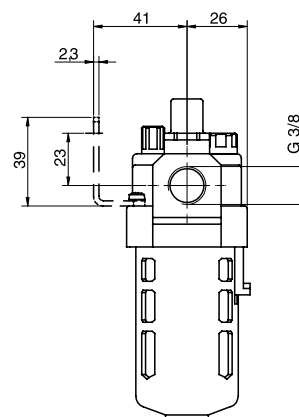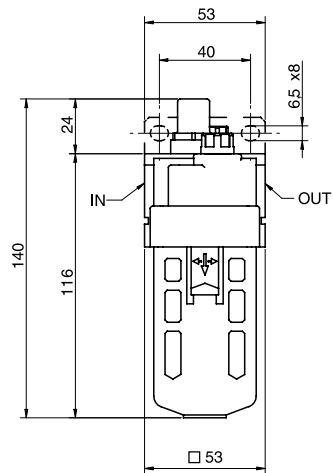

Version	Symbol	Code	Item
Lubricator		090109	A38L